


### USEABLE HEIGHTS



## SPECIFICATIONS

SUBJECT TO CHANGE WITHOUT NOTICE

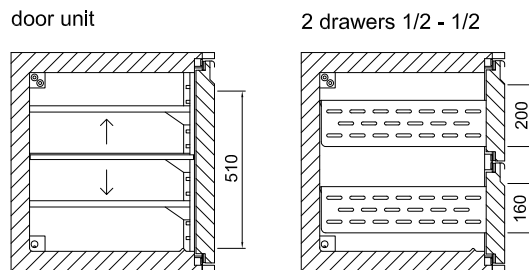

(measures in mm)	TKE 1-71	TKE 2-71	TKE 3-71
<b>Outside dimensions:</b>			
Width (measure A) x depth x height	1000 x 660 x 710	1400 x 660 x 710	1900 x 660 x 710
Carcase: width x depth x height	600 x 660 x 710	1000 x 660 x 710	1500 x 660 x 710
Refr. capacity (evap. @ -30°C)	280 Watt	280 Watt	400 Watt
Refrigerant	R 404A		
Temperature range	-18°C to -22°C		
SPL (distance 1 m)	61,5 dB(A)	61,5 dB(A)	63,5 dB(A)
Power input	680 Watt	750 Watt	1300 Watt
Power consumption	9,02 kW/24h	9,36 kW/24h	14,30 kW/24h
Voltage	230 V 50 Hz		

**Specification at +40°C ambient temperature and 40% RH (climate classification 5 acc. to DIN EN ISO 23953).**