


USEABLE HEIGHTS



SPECIFICATIONS

SUBJECT TO CHANGE WITHOUT NOTICE

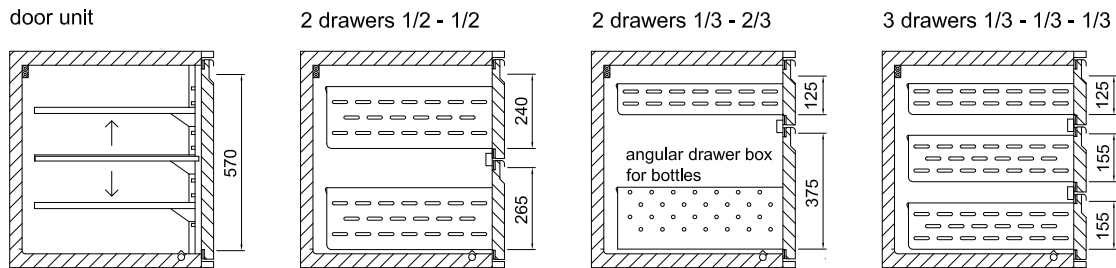

(measures in mm)	KTE 1-70	KTE 2-70	KTE 3-70	KTE 4-70
Outside dimensions:				
Width (measure A) x depth x height	770 x 660 x 700	1130 x 660 x 700	1570 x 660 x 700	2010 x 660 x 700
Carcase: width x depth x height	520 x 660 x 700	880 x 660 x 700	1320 x 660 x 700	1760 x 660 x 700
Refr. capacity (evap. @ -10°C)	240 Watt	305 Watt	370 Watt	460 Watt
Refrigerant	R 134a			
Temperature range	-2°C to +8°C			
SPL (distance 1 m)	52,2 dB(A)	55,5 dB(A)	55,5 dB(A)	61,5 dB(A)
Power input	265 Watt	300 Watt	420 Watt	535 Watt
Power consumption	3,82 kW/24h	4,32 kW/24h	6,05 kW/24h	7,70 kW/24h
Voltage	230 V 50 Hz			

Specification at +40°C ambient temperature and 40% RH (climate classification 5 acc. to DIN EN ISO 23953).